

More power and increased mileage 65 Series



MICHELIN MULTIBIB



ROAD

CARE FOR THE SOIL



Service life: lasts up to
1.5 years* longer

Sizes

320/65 R16 TL 107A8/104B	480/65 R28 TL 136D
320/65 R18 TL 109A8/106B	540/65 R28 TL 142D
340/65 R18 TL 113A8/110B	540/65 R30 TL 143D
420/65 R20 TL 125A8/125B	540/65 R34 TL 145D
420/65 R24 TL 126A8/126B	600/65 R34 TL 151D
440/65 R24 TL 128D	540/65 R38 TL 147D
480/65 R24 TL 133D	600/65 R38 TL 153D
540/65 R24 TL 140D	650/65 R38 TL 157D
420/65 R28 TL 128A8/128B	650/65 R42 TL 158D
440/65 R28 TL 131D	

* Compared with the MICHELIN XM 108. Source: MICHELIN Test and Research Centre (Ladoux)

Up to 35%* longer service life

- New rubber compound
- Flat crown
- D Index (65 km/h**)

Care for the soil and comfort

- Optimised ground pressure
- Flexible sidewalls
- Greater comfort at up to 65 km/h.**




Footprint **10% bigger**

MICHELIN XM 108 MICHELIN MULTIBIB

More efficient traction

- Deep tread lugs
- Tread lug shape making for excellent self-cleaning

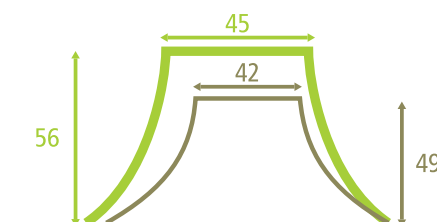

MICHELIN MULTIBIB
MICHELIN XM 108
Measurement on 600/65 R38 tyre

Enhances tractor appearance

- Wide tread
- Modern and attractive sidewall design

* Compared with the MICHELIN XM 108

** Where authorised by the legislation in force in the country

Characteristics of MICHELIN 65 series wide tyres

MICHELIN MULTIBIB Plus <28" XM108 Sizes

80 to 200 HP

Ø inches	Tyre sizes	CAI	Tyre characteristics				Rim widths ⁽¹⁾ inches	Tube ⁽²⁾	75% internal volume litres	Pressure (bar) and (psi) – Load per tyre in kg ^{(3) - (4)}																					
			S mm	D mm	R' mm	R.C. mm				Bar Psi	0.40 6	0.50 7	0.60 9	0.80 12	1.00 15	1.10 16	1.20 17	1.30 19	1.40 20	1.50 22	1.60 23	1.70 25	1.80 26	1.90 28	2.00 29						
16	320/65 R16 107A8/104B TL XM108	123896	309	844	375	2501	W8 W8L, W9, W10L	827	64	10	380	505	630	760	885	950	1 015	1 075	1 140	1 205	1 270	1 330	1 395	1 460							
										30	370	470	570	665	760	810	855	900	950	995	1 040										
										40		440	540	630	715	760	800	845	890	935	980										
										50		410	500	580	660	700	740	780													
18	320/65 R18 109A8/106B TL XM108	123898	309	875	389	2594	W9 W7, W10	828	63	10	400	535	670	805	940	1 010	1 075	1 145	1 210	1 280	1 345	1 415	1 480	1 550							
										30	390	500	610	710	805	855	900	950	1 000	1 050	1 100										
										40		460	570	660	755	800	850	895	940	985	1 030										
										50		430	520	605	690	735	780	820	865	905	950										
	340/65 R18 113A8/110B TL XM108	123888	323	918	407	2719	W9 W10	828	76	10	450	600	750	900	1 050	1 125	1 200	1 280	1 355	1 430	1 505	1 580	1 655	1 730							
										30	440	560	680	790	900	955	1 010	1 065	1 120	1 175	1 230										
										40		520	630	735	840	895	945	1 000	1 050	1 100	1 150										
										50		480	580	675	770	820	870	915	965	1 010	1 060										
20	420/65 R20 125A8/125B TL XM108	122702	396	1064	461	3135	W11 W10, W12	664	140	10	970	1 140	1 310	1 525	1 735	1 840	1 950	2 055	2 160	2 265	2 375	2 480									
										30	770	925	1 080	1 250	1 425	1 510	1 600	1 685	1 770												
										40		830	1 010	1 170	1 330	1 410	1 490	1 570	1 650												
										50		830	1 010	1 115	1 225	1 275	1 330	1 385	1 435	1 490	1 545	1 595	1 650								
24	420/65 R24 126A8/126B TL XM108	122712	395	1160	507	3425	W11 W10, W12	700	150	10	990	1 170	1 350	1 570	1 785	1 895	2 005	2 115	2 225	2 330	2 440	2 550									
										30	790	950	1 110	1 290	1 465	1 555	1 640	1 730	1 820												
										40		850	1 040	1 205	1 370	1 455	1 535	1 620	1 700												
										50		850	1 040	1 150	1 260	1 315	1 370	1 425	1 480	1 535	1 590	1 645	1 700								
440/65 R24 128D TL MULTIBIB	426389	439	1187	529	3519	DW14L W13, DW13, W14L, W15L, DW15L,	703	177	40 Dual	820	910	995	1 160	1 330	1 410	1 495	1 555	1 615	1 675	1 735											
									10	1 285	1 370	1 450	1 655	1 855	1 960	2 060	2 145	2 225	2 310	2 390	2 475	2 560	2 640	2 725							
									30	980	1 080	1 180	1 380	1 580	1 680	1 780	1 850	1 925	2 000	2 070											
									40			1 130	1 320	1 510	1 605	1 700	1 770	1 835	1 900	1 970											
									50			1 080	1 265	1 445	1 540	1 630	1 695	1 760	1 825	1 890											
									65			1 030	1 205	1 375	1 465	1 550	1 610	1 675	1 740	1 800											
480/65 R24 133D TL MULTIBIB	531721	483	1240	546	3667	DW15L W14L, DW14L, W15L	710	218	40 Dual	940	1 040	1 135	1 320	1 505	1 600	1 690	1 765	1 840	1 915	1 990											
									10	1 450	1 575	1 700	1 920	2 140	2 250	2 360	2 460	2 560	2 655	2 755	2 855	2 950	3 050	3 150							
									30	1 120	1 240	1 360	1 575	1 795	1 900	2 010	2 100	2 190	2 280	2 370											
									40			1 290	1 500	1 710	1 815	1 920	2 005	2 090	2 175	2 260											
									50			1 240	1 440	1 640	1 740	1 840	1 920	2 000	2 080	2 160											
									65			1 180	1 370	1 560	1 655	1 750	1 830	1 905	1 980	2 060											
540/65 R24 140D TL MULTIBIB	097057	532	1312	573	3873	DW16L W16L, W18L, DW18L ⁽⁵⁾	710	287	40 Dual	1 140	1 240	1 345	1 575	1 810	1 925	2 040	2 130	2 225	2 320	2 410											
									10	1 750	1 875	2 000	2 265	2 535	2 665	2 800	2 920	3 040	3 155	3 275	3 395	3 510	3 630	3 750							
									30	1 360	1 485	1 610	1 885	2 165	2 300	2 440	2 550	2 660	2 770	2 880											
									40			1 530	1 795	2 055	2 190	2 320	2 425	2 530	2 635	2 740											
									50			1 470	1 725	1 975	2 105	2 230	2 330	2 430	2 530	2 630											
									65			1 400	1 640	1 880	2 000	2 120	2 215	2 310	2 405	2 500											

⁽¹⁾ The reference rim is shown in bold type.⁽²⁾ KLEBER tube code.⁽³⁾ For ploughing and other applications subject to high torque use the 30 km/h row.⁽⁴⁾ 0.4 and 0.5 bar (6 and 7 psi) for work at low torque.⁽⁵⁾ For further information on rims, refer to the "Rims and valves" section on pages 122-123.

IMPORTANT: the inflation pressure must always be appropriate for the load per tyre, the speed of travel and the work to be done.

40 Dual: Twin fitment use.

10: max speed (low torque) e.g. soil treatment machines in the field.

30: use in the field at higher torque and travel on the road up to a maximum speed of 30 km/h.

40: use on the road up to a maximum speed of 40 km/h.

50: use on the road up to a maximum speed of 50 km/h.

65: use on the road up to a maximum speed of 65 km/h.

Characteristics of MICHELIN 65 series wide tyres

MICHELIN MULTIBIB Plus <28" XM108 Sizes

80 to 200 HP

Ø inches	Tyre sizes	CAI	Tyre characteristics				Rim widths ⁽¹⁾ inches	Tube ⁽²⁾	75% internal volume litres	Pressure (bar) and (psi) – Load per tyre in kg ^{(3) - (4)}																	
			S mm	D mm	R' mm	R.C. mm				Bar Psi	0.40 6	0.50 7	0.60 9	0.80 12	1.00 15	1.10 16	1.20 17	1.30 19	1.40 20	1.50 22	1.60 23	1.70 25	1.80 26	1.90 28	2.00 29		
28	420/65 R28 128A8/128B TL XM108	122722	392	1263	559	3767	W11 W10, W12	732	165	10 30 40 50	1 050 840	1 240 1 005 900 900	1 430 1 170 1 100 1 100	1 660 1 360 1 275 1 215	1 890 1 550 1 450 1 335	2 005 1 645 1 540 1 390	2 125 1 740 1 625 1 450	2 240 1 835 1 710 1 510	2 355 1 930 1 800 1 565	2 470 2 585 2 700 1 625	2 585 2 700 1 740 1 685	2 700 1 800					
	440/65 R28 131D TL MULTIBIB	386212	437	1291	579	3833	W14L W13, W14L W15L, DW15L	821	198	40 Dual 10 30 40 50 65	890 1 360 1 060	970 1 480 1 155	1 045 1 600 1 250 1 190 1 140 1 090	1 230 1 795 1 465 1 395 1 335 1 275	1 410 1 985 1 790 1 705 1 630 1 465	1 505 2 085 1 900 1 810 1 730 1 555	1 595 2 180 1 900 1 890 1 810 1 650	1 670 2 270 2 385 1 890 1 810 1 725	1 740 2 360 2 070 1 975 1 890 1 800	1 810 2 450 2 155 2 060 1 970 1 875	1 885 2 540 2 240 2 140 2 050 1 950	2 630 2 720 2 810 2 900					
	480/65 R28 136D TL MULTIBIB	897574	476	1339	596	3970	DW15L W14L, DW14L, W15L	822	241	40 Dual 10 30 40 50 65	990 1 550 1 180	1 100 1 675 1 310	1 205 1 800 1 440 1 370 1 310 1 250	1 415 2 035 1 690 1 605 1 540 1 465	1 620 2 265 1 940 1 960 1 770 1 685	1 725 2 385 2 065 2 080 2 000 1 900	1 830 2 500 2 190 2 080 2 000 1 900	1 910 2 605 2 290 2 170 2 090 1 985	1 990 2 710 2 385 2 265 2 175 2 070	2 075 2 820 2 480 2 360 2 260 2 155	2 155 2 925 2 580 2 450 2 350 2 240	3 030 3 140 3 245 3 350					
	540/65 R28 142D TL MULTIBIB	792274	529	1427	630	4223	DW16L W16L, W18L, DW18L ⁽⁵⁾	822	318	40 Dual 10 30 40 50 65	1 205 1 900 1 440	1 325 2 040 1 585	1 445 2 180 1 730 1 640 1 580 1 500	1 680 2 455 2 015 1 910 1 835 1 745	1 920 2 725 2 295 2 180 2 095 1 995	2 035 2 865 2 440 2 315 2 220 2 115	2 155 3 000 2 580 2 450 2 350 2 240	2 255 3 125 2 700 2 560 2 460 2 340	2 350 3 250 2 815 2 675 2 565 2 445	2 450 3 375 2 930 2 790 2 670 2 550	2 550 3 500 3 050 2 900 2 780 2 650	3 625 3 750 3 875 4 000					
30	540/65 R30 143D TL MULTIBIB	223153	527	1472	648	4353	DW16L W16L, W18L, W18L DW18L ⁽⁵⁾	754	333	40 Dual	1 240	1 370	1 495	1 735	1 980	2 100	2 220	2 320	2 420	2 520	2 620	3 730	3 860	3 995	4 125		
										10	1 950	2 095	2 240	2 520	2 795	2 935	3 075	3 205	3 340	3 470	3 600	3 730	3 860	3 995	4 125		
										30	1 480	1 630	1 780	2 070	2 360	2 505	2 650	2 770	2 890	3 010	3 130						
										40			1 700	1 975	2 245	2 385	2 520	2 635	2 750	2 865	2 980						
										50			1 630	1 895	2 155	2 290	2 420	2 530	2 640	2 750	2 860						
34	540/65 R34 145D TL MULTIBIB	712064	530	1574	693	4655	DW16L DW18L, W16L, W18L ⁽⁵⁾	704	363	40 Dual	1 310	1 450	1 595	1 865	2 140	2 275	2 410	2 510	2 605	2 700	2 800	3 955	4 095	4 235	4 375		
										10	2 060	2 210	2 360	2 655	2 955	3 100	3 250	3 390	3 530	3 670	3 810	3 955	4 095	4 235	4 375		
										30	1 560	1 730	1 900	2 225	2 555	2 715	2 880	2 995	3 110	3 225	3 340						
										40			1 810	2 120	2 430	2 585	2 740	2 850	2 960	3 070	3 180						
										50			1 730	2 030	2 330	2 480	2 630	2 735	2 840	2 945	3 050						
600/65 R34 151D TL MULTIBIB	557189	594	1654	732	4897	DW20B (A) W18L, DW18L	823	463	40 Dual	1 540	1 710	1 885	2 190	2 495	2 650	2 800	2 930	3 060	3 195	3 325	4 670	4 830	4 990	5 150			
									10	2 430	2 615	2 800	3 160	3 515	3 695	3 875	4 035	4 195	4 355	4 510	4 670	4 830	4 990	5 150			
									30	1 840	2 040	2 240	2 605	2 975	3 155	3 340	3 500	3 655	3 810	3 970							
									40			2 140	2 485	2 835	3 005	3 180	3 330	3 480	3 630	3 780							
									50			2 050	2 385	2 715	2 885	3 050	3 190	3 335	3 480	3 620							
65			1 950	2 265	2 585	2 740	2 900	3 040	3 175	3 310	3 450																

⁽¹⁾ The reference rim is shown in bold type.
⁽²⁾ KLEBER tube code.

⁽³⁾ For ploughing and other applications subject to high torque use the 30 km/h row.
⁽⁴⁾ 0.4 and 0.5 bar (6 and 7 psi) for work at low torque.
⁽⁵⁾ For further information on rims, refer to the "Rims and valves" section on pages 122-123.

40 Dual: Twin fitment use.
10: max speed (low torque) e.g. soil treatment machines in the field.
30: use in the field at higher torque and travel on the road up to a maximum speed of 30 km/h.
40: use on the road up to a maximum speed of 40 km/h.
50: use on the road up to a maximum speed of 50 km/h.
65: use on the road up to a maximum speed of 65 km/h.

IMPORTANT: the inflation pressure must always be appropriate for the load per tyre, the speed of travel and the work to be done.

Characteristics of MICHELIN 65 series wide tyres MICHELIN MULTIBIB

80 to 200 HP

Ø inches	Tyre sizes	CAI	Tyre characteristics				Rim widths ⁽¹⁾ inches	Tube ⁽²⁾	75% internal volume litres	Pressure (bar) and (psi) – Load per tyre in kg ^{(3) - (4)}															
			S mm	D mm	R' mm	R.C. mm				Bar Psi	0.40 6	0.50 7	0.60 9	0.80 12	1.00 15	1.10 16	1.20 17	1.30 19	1.40 20	1.50 22	1.60 23	1.70 25	1.80 26	1.90 28	2.00 29
38	540/65 R38 147D TL MULTIBIB	114518	529	1675	745	4965	DW16L DW18L, W18L, W16L ⁽⁵⁾	824	393	40 Dual 10 30 40 50 65	1 400 2 180 1 670	1 545 2 340 1 840	1 690 2 500 2 010 1 920 1 840 1 750	1 955 2 815 2 325 2 220 2 125 2 025	2 215 3 135 2 645 2 520 2 415 2 300	2 350 3 290 2 800 2 670 2 555 2 440	2 480 3 450 2 960 2 820 2 700 2 575	2 600 3 595 3 105 2 960 2 830 2 700	2 720 3 745 3 250 3 095 2 965 2 825	2 845 3 890 3 395 3 230 3 100 2 950	2 965 4 040 3 540 3 370 3 230 3 075	4 185	4 330	4 480	4 625
	600/65 R38 153D TL MULTIBIB	228045	595	1768	779	5229	DW20B (A) W18L, DW18L	825	500	40 Dual 10 30 40 50 65	1 645 2 575 1 960	1 820 2 770 2 165	1 990 2 970 2 370 2 260 2 160 2 060	2 315 3 355 2 760 2 630 2 515 2 400	2 640 3 740 3 150 3 000 3 050 2 735	2 800 3 935 3 345 3 185 3 050 2 905	2 965 4 125 3 540 3 370 3 230 3 075	3 105 4 290 3 705 3 530 3 380 3 220	3 240 4 455 3 870 3 685 3 530 3 360	3 380 4 620 4 035 3 840 3 680 3 505	3 520 4 790 4 200 4 000 3 830 3 650	4 955	5 120	5 285	5 450
	650/65 R38 157D TL MULTIBIB	292904	646	1819	801	5380	DW20B (A) ⁽⁵⁾	825	602	40 Dual 10 30 40 50 65	1 835 2 900 2 190	2 030 3 125 2 420	2 220 3 350 2 650 2 520 2 420 2 300	2 590 3 775 3 090 2 940 2 820 2 685	2 955 4 200 3 530 3 360 3 220 3 065	3 140 4 410 3 750 3 570 3 420 3 260	3 325 4 625 3 970 3 780 3 620 3 450	3 490 4 815 4 160 3 965 3 800 3 620	3 650 5 005 4 355 4 150 3 975 3 790	3 815 5 195 4 550 4 335 4 150 3 955	3 980 5 390 4 740 4 520 4 330 4 125	5 580	5 770	5 960	6 150
42	650/65 R42 158D TL MULTIBIB	167733	638	1931	858	5722	DW20B (A) ⁽⁵⁾	802	646	40 Dual 10 30 40 50 65	1 930 3 000 2 300	2 135 3 225 2 545	2 340 3 450 2 790 2 660 2 550 2 430	2 735 3 885 3 260 3 105 3 405 2 835	3 125 4 315 3 730 3 555 3 615 3 245	3 325 4 535 3 965 3 775 3 615 3 445	3 520 4 750 4 200 4 000 3 830 3 650	3 660 4 955 4 370 4 160 3 990 3 800	3 805 5 155 4 545 4 325 4 145 3 950	3 950 5 360 4 720 4 490 4 300 4 100	4 090 5 560 4 890 4 650 4 460 4 250	5 765	5 970	6 170	6 375

⁽¹⁾ The reference rim is shown in bold type.
⁽²⁾ KLEBER tube code.

⁽³⁾ For ploughing and other applications subject to high torque use the 30 km/h row.
⁽⁴⁾ 0.4 and 0.5 bar (6 and 7 psi) for work at low torque.
⁽⁵⁾ For further information on rims, refer to the "Rims and valves" section on pages 122-123.

40 Dual: Twin fitment use.
10: max speed (low torque) e.g. soil treatment machines in the field.
30: use in the field at higher torque and travel on the road up to a maximum speed of 30 km/h.
40: use on the road up to a maximum speed of 40 km/h.
50: use on the road up to a maximum speed of 50 km/h.
65: use on the road up to a maximum speed of 65 km/h.

IMPORTANT: the inflation pressure must always be appropriate for the load per tyre, the speed of travel and the work to be done.